



**John Deere | Compact without compromise**



**JOHN DEERE**

# XXL versatility.



Handles heavy attachments easily.



Move snow banks.



Spread everything from sand to seeds.



Prepare soil for planting.



Maintain public property.



Clear snow and ice.

We began with the assumption: you can never have a tractor capable of doing too much. That's why we built into the 18 kW (24 hp) 2320 a full suite of capabilities – even to the point of mak-

ing them able to work with three implements at once. Because, even though you may only have a budget for a smaller machine, you can't afford to have a tractor that does any less.



Transport up to 2000 kg of material.



Keep parks and pavements clean.



Leave a flawless cut behind.



### **Grounds Care Maintenance**

Day-in and day-out, reliability and exceptional versatility make a 2020 Series tractor an ideal addition to a maintenance crew.



### **Camping Grounds Maintenance**

The 2020 Series was developed using the same performance standards as our larger tractors, so they can handle a full-load of tasks.



# Full size performance and attachability.

Even though they're smaller, you won't find a single component inside these tractors that only goes "halfway" in meeting performance standards. With commercial-grade engines and transmissions, rugged axles for heavier loads, position-control hydraulic lifts, heavy duty hydraulic pumps, quick-attachment systems and more, they're every inch a John Deere.



## **Drive over deck.**

New OnRamp mower decks are the fastest in the industry to install, thanks to a pin-based drive on, drive off system.




**1.37 m (54") Drive-over deck**



**1.57 m (62") Drive-over deck**



**1.53 m (60") Rear Discharge deck**

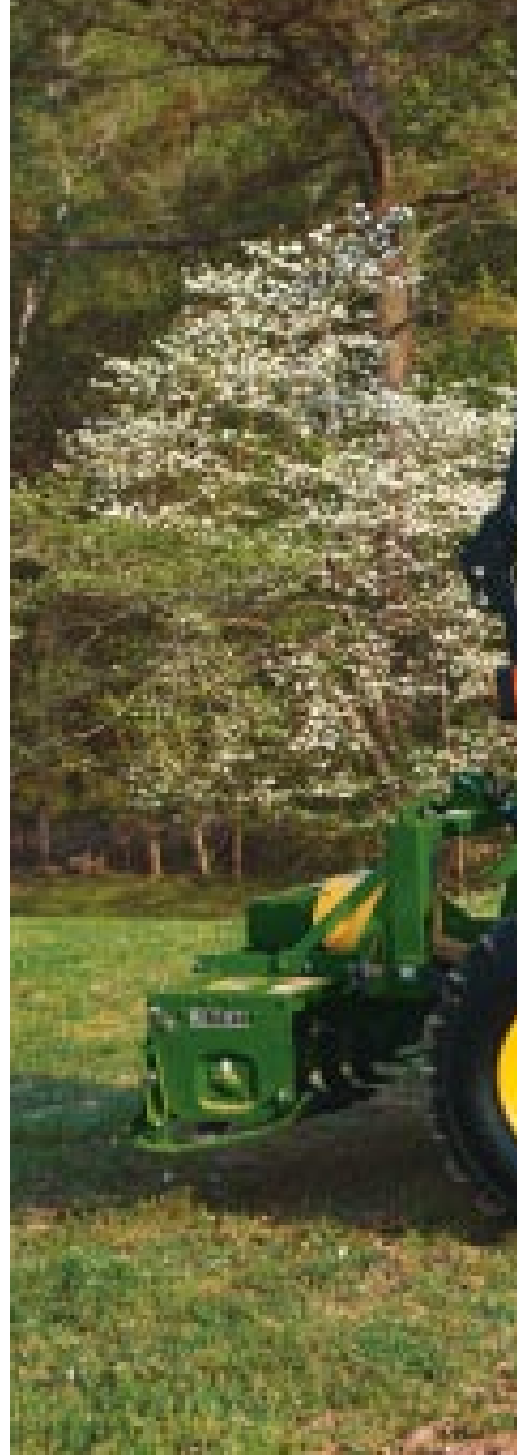

## **A performance matched loader**

plus high axle loads equal an outstanding ability to move and lift earth.



#### **Real power**

Dig in to any job with high torque engines and standard four wheel drive. Engines are specially designed to deliver low end lugging power to pull heavy loads and move earth. One-piece flip-up hood ensures easy serviceability.



#### **Efficient operation**

Always make the most of your time with a two-pedal, car like, transmission that makes it easy to switch directions. Just press left for forward, right for reverse. Pedals handle one of the strongest hydrostatic transmissions in the industry.



#### **Fast attachment**

Go from loading to mowing in minutes. 200 CX QuickPark Loader detaches in under one minute – with no tools required.

# Full-size comfort.



## Cab

Roomy cab option includes plenty of leg room, a powered ventilation and heating system and visibility to the loader all the way to the top of the lift cycle.



## Front hitch

Optional front hitch allows hook up to a variety of attachments in less than one minute. Lift capacity and design fit the tractor perfectly.



## Tyre types

Turf Tyres/R3 – Less aggressive tread is perfect for mowing and landscape work.



Industrial/R4 – Excellent traction and is softer on the grass than agricultural tyres. Often the preferred choice.



## 2320

### Engine

Engine  
Gross engine Power  
Power according to EEC R24  
PTO  
Cyl/Displacement  
Max. Torque  
RPM  
Cooling system  
Air cleaner  
  
Fuel tank capacity

3 cyl. Diesel  
17.7 kW (23.8 hp)  
16.9 kW (22.7 hp)  
13.4 kW (18 hp)  
1116 ccm  
62.8 Nm at 1900 rpm  
3000 min<sup>-1</sup>  
water pump  
Dry type w/ safety element and  
restriction indicator  
23 ltr

### Transmission

Clutch  
Brakes  
Speed (forward)  
PTO speed  
Mid/Front PTO  
PTO clutch/brake

HST  
2 range  
NA  
wet disc  
20 km/h  
540  
2100  
yes

### Hydraulic system

Steering  
Steering/hydraulic-flow, 2 pumps  
Hydraulic pressure  
Rockshaft 3 pt. Hitch  
Lift. Capacity at lift points  
Lift. Capacity at lift points  
24" behind lift ends

open system  
Hydraulic  
31.8 ltr/min.  
167 bar  
Cat1  
650 kg  
  
522 kg

### Dimensions

Overall length  
Min. tread width R3  
Max. tread width R3  
Min. total width  
Ground clearance  
Height to Top ROPS  
Height to Top CAB  
Max. Weight  
Weight w/ ROPS  
Weight w/ cab (kg)  
Max front axle load  
Max rear axle load  
Tow load w/ brake  
Towing capacity

2845 mm  
834 mm  
941 mm  
1228 mm  
248 mm  
2261 mm  
1960 mm  
2000 kg  
805 kg  
1005 kg  
880 kg  
1600 kg  
2000 kg  
2000 kg

### Tyres

Turf R3-Tyres, front  
Turf R3-Tyres, rear  
Industrial R4 - Tyres, front  
Industrial R4 - Tyres, rear

23x8.5-12  
31x13.5-15  
23x8.5-12  
12-16.5



## 2520

3 cyl. Diesel  
19.7 kW (26.4 hp)  
19.1 kW (25.6 hp)  
14.9 kW (20 hp)  
1331 ccm  
84.6 Nm at 1200 rpm  
2600 min<sup>-1</sup>  
water pump  
Dry type w/ safety element and  
restriction indicator  
27 ltr

HST  
2 range  
NA  
wet disc  
22 km/h  
540  
2100  
yes

open system  
Hydraulic  
39.6 ltr/min.  
167 bar  
Cat1  
650 kg  
  
522 kg

2835 mm  
954 mm  
995 mm  
1294 mm  
268 mm  
2279 mm  
1999 mm  
2000 kg  
915 kg  
1115 kg  
880 kg  
1600 kg  
2000 kg  
2000 kg

24x8.5-14  
36x14-15  
23x8.5-12  
14-17.5

## 200CX Loader

Loader raising time  
Loader lowering time  
Bucket dumping time/regen  
Bucket rollback time

3.19 sec  
1.95 sec  
3.21/1.25 sec  
1.95 sec

### Maximum Lift Height:

To pivot pin (A)  
Reach:  
At max. lift height (D)

2000 mm (78.7 in)  
  
744 mm (29.3 in)

### Angles:

Max. dump angle (E)  
Max. rollback angle (G)

38 degrees  
25 degrees

### Lift Capacity:

To max. height at pivot pin (U)  
Breakout Force:  
At pivot pin (Y)

363 kg (798.6 lb)  
  
9510 N (2138 lb/ft)







# No one builds or backs equipment better than John Deere.

With a highly trained network of servicing dealers, a world class parts support network and online parts ordering, no other company makes it easier to keep your operation running like clockwork.

No wonder **Nothing Runs Like A Deere** is not just a slogan.

All products subject to availability.

This literature has been compiled for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include finance, product options and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specification and design of products described in this literature without notice.

[www.johndeere.co.uk](http://www.johndeere.co.uk)  
[www.JohnDeereInternational.com](http://www.JohnDeereInternational.com)  
[www.johndeere.co.za](http://www.johndeere.co.za)



## JOHN DEERE

**Nothing Runs Like A Deere**