

LUBRICATION AND MAINTENANCE

Front Axle

Capacity 4.0 liters (4.2 US qt.)

Recommended Lubricant MF Permatran III®

Grease Fittings

Recommended Grease Massey Ferguson M-1105 or equivalent lithium base grease No. 2

Lubrication and Fill Locations

FIG. 97: Lubrication, fill, and drain locations on the tractor

Ref	Description	Type
1	Crankcase	Engine oil
2	Engine radiator	Coolant
3	Fuel tank	Diesel fuel - Ultra Low Sulfur diesel fuel only
4	Rear housing	Hydraulic oil
5	Four-wheel drive axle	Hydraulic oil
6	Brake pivots	Grease
7	Leveling turnbuckle	Grease
8	Hydrostatic pedals	Grease

- Grease fittings
- ⊙ Fill location
- ⊕ Drain location
- ▲ Oil check window
- ⊗ Coolant fill location
- △ Coolant drain location
- Oil check dipstick

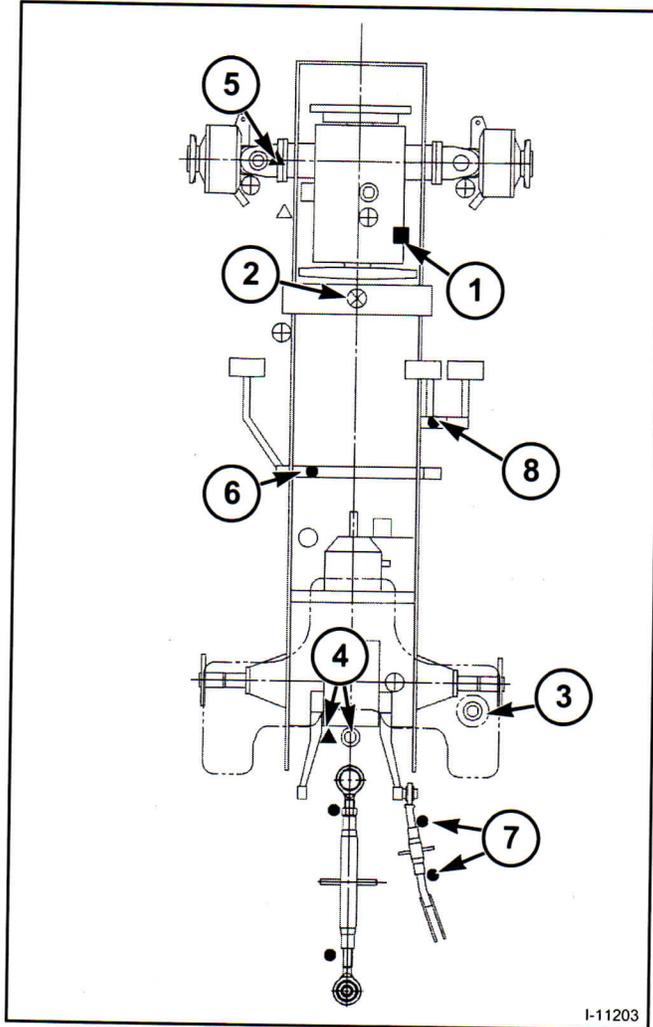


FIG. 97

I-11203