



J SERIES

POWER RANGE: For 15 to 28 PTO h.p. with maximum engine capacity of 100 cu. inches or 75 Ft/lbs. torque.

LINKAGE: Category 1-3 Point Linkage

WIDTH OF TILLAGE: 32", 40" or 50" Centrally mounted.

DEPTH OF CUT: Adjustable to 7" maximum by twin depth control wheels, or skids.

TRANSMISSION: By shielded U.J. assembly to single speed 1.5:1 ratio gearbox for use with 540 PTO only. Final drive to rotor by 1" pitch, high-fatigue capacity chain.

Special Reverse gearbox available for Kubota B,6000



SHEAR PIN: standard on J-32. Shearpin and clutch optional on J-40 & J-50.

ROTOR: Four blades per flange, operating at 240 r.p.m. at 540 PTO speed. Rotor speeds with optional 9-tooth drive sprocket.

540 r.p.m. PTO = 162 r.p.m. Rotor speed
 800 r.p.m. PTO = 240 r.p.m. Rotor speed
 840 r.p.m. PTO = 252 r.p.m. Rotor speed
 1000 r.p.m. PTO = 300 r.p.m. Rotor speed

SHIPPING SPECIFICATIONS: Each machine fully cartoned with pallet base.

Model	Weight	Length	Width	Height
J32	510	50	28	28
J40	550	60	28	28
J50	590	60	28	28

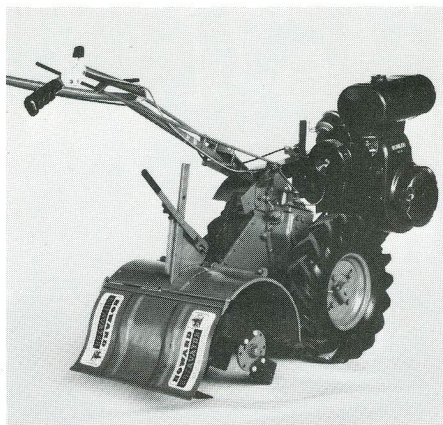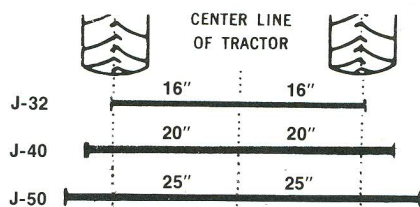

"350" SERIES

ENGINE: Kohler K141T, 4 cycle, side valve, air cooled gas engine. Max. B.H.P. 6.2 Hp. @ 3,600 r.p.m. Replaceable dry type air cleaner. "Easy-Spin" recoil starter, standard equipment.

CLUTCH: Cone-type.

TRANSMISSION: V-belt pulley to gear box. Bullwheel and pinion gears to landwheels and 5/8" pitch roller chain to rotor.

TRAVEL SPEEDS: 3600 r.p.m.: Low Range .75 & 2.5 m.p.h. Hi Range 1.65 & 5.0 m.p.h. Reverse 1.3 & 2.6 m.p.h.

CONTROLS: 1. Throttle Control by lever and cable. 2. Clutch Control by cable and lever. 3. Gear Lever by central rod, including spring-out safety reverse. 4. Rotor Selector by hand lever. 5. Depth Control by adjustable hand lever.

HANDLEBARS: Adjustable for height. Swinging handlebars.


ROTOR WIDTHS: 16 in. or 23 in. cutting width. Rotor diameter 12 in. The 23 inch extensions and side shields are supplied as optional extras.

TILLAGE DEPTH: Adjustable down to 6".

WHEELS: Wheels 4.00 x 8 tractor tread tires. Tire Pressure 20 lb/sq. in.

DIMENSIONS: Length 61 in. Minimum height (to top of handlebars—blades on ground) 38 in. Overall width at rotor level 17 1/2 in.

WEIGHT: 16" Model—324 lbs.
 23" Model—345 lbs.

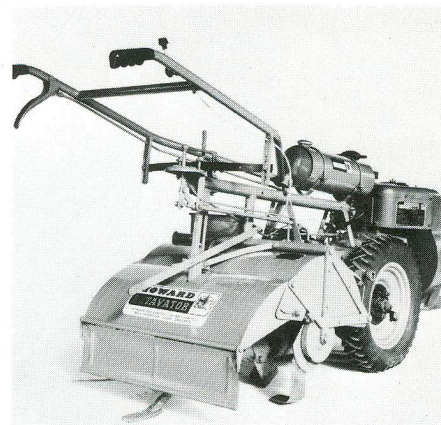

GEM SERIES

ENGINE: Wisconsin AENL developing . . . 9.2 hp and Wisconsin TJD developing . . . 15.2 hp.

CLUTCH: Heavy duty dry plate.

TRANSMISSION: Three speed forward and safety reverse. Machine cut gears hardened and running in oil. All shafts mounted on ball bearings. Differential for easy turning and automatically locked when rotor is engaged.

ROTOR WIDTHS: Widths 20"—24" and 30". 30" model is fitted with dual wheels and depth control wheel as standard equipment.

TILLAGE DEPTH: Adjustable down to 9 in.

TRAVEL SPEEDS: 1st Gear—.87 mph; 2nd Gear—1.3 mph; 3rd Gear—2.82 mph; Reverse—1.69 mph.

OVERALL DIMENSIONS: Length 6'8"; Width with 20" rotor 2'11"; Width with 30" rotor 2'11".

WEIGHT 20" Model c/w AENL 709 lbs.
 20" Model c/w TJD 830 lbs.
 24" Model c/w TJD 853 lbs.
 30" Model c/w TJD 1007 lbs.

ATTACHMENTS: (Optional at additional cost) Furrowing Attachment. Pickline Rotor.

We reserve the right to change specifications at any time.



HOWARD[®]
 Howard Rotavator Co., Inc.
 A Member of the Howard Group
 Harvard, Illinois 60033
 Branches in Sacramento, Calif.,
 and Savannah, Ga.



ROTAVATOR BIG BALER V-CHISEL POWER-ARM SPIKE ROTOR PEAR LOADER MAGNATE TURF-QUAKER ROTAVATOR