

Swingtrim

3.5m (11' 6") reach



Machine Features

- » 3.2m or 3.5m reach (1.2m or 1.5m Cutterbar options)
- » Dual Cutting (L.H. and R.H. cutting)
- » Low power requirement
- » Three-point linkage-mounting system
- » Operator friendly
- » Choice of control systems
- » Front mounting option
- » Eliminates white finger

Markets

- » Horticultural/Landscape
- » Groundcare/Amenity
- » Governmental
- » Contractors

Tractor Requirements

- » 550kg minimum tractor weight
- » 15hp minimum tractor horse power

McCONNEL POWER ARMS

Tractor Requirements			
Minimum Horse Power Requirements	15hp	Minimum Tractor Weight	550kg
Machine Specification			
Maximum Reach	3.5m (11'6")	Power Arm Horsepower	15hp
Machine Weight*	192kg	Oil tank Capacity	N/A
Hydraulics			
Gear Semi Independent	<input type="checkbox"/>	Gear Totally Independent	<input type="checkbox"/>
Piston Hydraulics - 30% Power Upgrade	—		
Method of Attachment			
3-Point Linkage-Mounted	■	5-Point Axle Bracket-Mounted	—
Controls			
Cable Control	<input type="checkbox"/>	Xtra Touch Control - Mini (XTC - Mini)	<input type="checkbox"/>
Switchbox	—	Xtra Touch Control	—
Monolever	—	V4 Pro Control (EDS optional) (V4 + EDS)	—
Machine Equipment			
Parallel Arm Geometry	—	Telescopic Dipper Arm	—
Midcut Pack or VFR	—	Angle Float Kit - Standard On Electric Models	—
Lift Float Kit	—	Easy Drive System (EDS)	—
Oil Cooler	—	Power Slew	—
Safety Breakaway - Mechanical	■	Cable Rotor Control - Dual Rotation (Ti only)	■
Road Lighting Kit	—	Electric Rotor Control - Dual Rotation (Ti only)	<input type="checkbox"/>
Warning Arrow - Magnetic	—	Window Guards	■
Cushioned Top Link	—	Debris Blower	—
Front Mounting Build	<input type="checkbox"/>	Orbitor Head Kit	—
Front Flap Kit	—	Flailhead Skid Kit	—
Hydraulic Roller	—	Flailhead Cushioned Grass Mowing Roller	—
Power Arm Attachments			
1.20m Swingtrim Cutter Bar	<input type="checkbox"/>	1.50m Multicut Flailhead - Piston BD	—
1.50m Swingtrim Cutter Bar	<input type="checkbox"/>	1.50m Omega Flailhead - GDD or BD	—
1.50m Sheartrim Cutter Bar - SD	—	1.50m Omega Flailhead - Piston BD	—
1.60m Sheartrim Cutter Bar - MD	—	1.60m Multicut Flailhead - GDD or BD	—
2.00m Sheartrim Cutter Bar - MD	—	1.60m Multicut Flailhead - Piston BD	—
1.40m Sheartrim Cutter Bar - HD	—	1.60m Omega Flailhead - GDD or BD	—
2.20m Sheartrim Cutter Bar - HD	—	1.60m Omega Flailhead - Piston BD	—
1.00m Compact Supercut Flailhead - GDD	—	2.00m Multicut Flailhead - GDD or BD	—
1.20m Supercut Flailhead - GDD	—	2.00m Multicut Flailhead - Piston BD	—
1.20m Multicut Flailhead - GDD or BD	—	1.20m Rotary Head - FC - 3 Rotor	—
1.20m Multicut Flailhead - Piston BD	—	1.50m Rotary Head - HD - 1 Rotor	—
1.20m Omega Flailhead - GDD or BD	—	1.65m Kirogen Mini Lem - 4 Rotor	—
1.20m Omega Flailhead - Piston BD	—	Kirogen Sawheads	—
1.50m Multicut Flailhead - GDD or BD	—	0.70m Ditch and Grip Cleaner	—
Standard Equipment	■	Optional Equipment	<input type="checkbox"/>
		Not Available	—


* depending on machine specification excluding attachment and oil

Control Options

The boxes that are ticked indicate the control options available for this Power Arm

<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	
	Cable		Switchbox
<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	
	Monolever		XTC - Mini
<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	
	XTC		V4 Pro

Choice of Controls

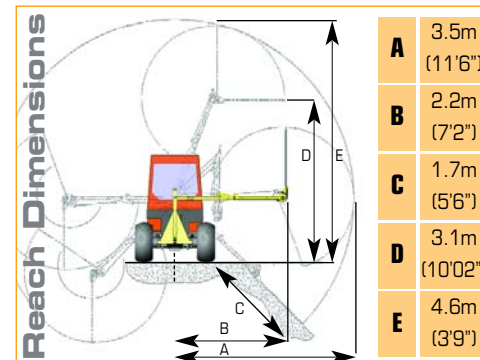

For illustration purposes only



Coniferous Hedges



Versatile Cuts Both-sides



Front Mount Option