

Grooming Mowers



Our Name Says It All



Rugged 7 Gauge, Crack Resistant Deck

Vented Belt Shield allows for easy cleanup, while allowing belts to stay cooler during use




3 blade setup provides consistent, even cutting every time

Flared deck directs material downward for even distribution



Full floating clevis style hitch allows for a perfect cut when going over hills

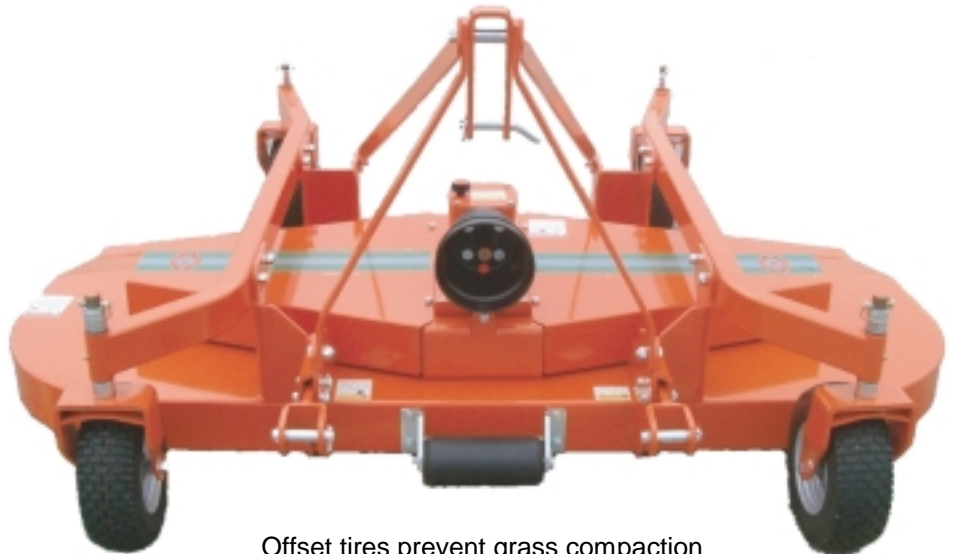

Offset tires prevent grass compaction while providing a tighter turning radius



Anti-Scalp roller prevents damage to grass when cutting uneven terrain

Grooming Mower Specifications

Specifications	GM30-48	GM30-60	GM30-72	GM35-84
Cutting width	48"	60"	72"	84"
Overall width	53"	64"	76"	88"
Discharge	rear discharge	rear discharge	rear discharge	rear discharge
Weight	392 lbs	432 lbs	472 lbs	816 lbs
Maximum Tractor-hp	30 hp	40 hp	50 hp	60 hp
Minimum Tractor-hp	15 hp	20 hp	30 hp	40 hp
Cutting height	from 3/4" to 4" 1/4	from 3/4" to 4" 1/4	from 3/4" to 4" 1/4	from 1" 1/2 to 4" 1/2
Deck material	self-cleaning deck, thickness 6 gauge	self-cleaning deck, thickness 6 gauge	self-cleaning deck, thickness 6 gauge	self-cleaning deck, thickness 7 gauge
Blades	3 heat-treated, offset and uplift type	3 heat-treated, offset and uplift type	3 heat-treated, offset and uplift type	3 heat-treated, offset and uplift type
Blade sizes	16 1/2" X 2 1/4"	20 1/2" X 2 1/4"	24 1/8" X 2 1/4"	28" X 2 1/4"
Blade overlap	1"	1"	1"	1 1/4"
Blade spindles	greasable	greasable	greasable	greasable
Blade tip speed	13700 fpm	14100 fpm	14200 fpm	15300 fpm
Hitch	cat-1	cat-1	cat-1	cat-1
Lower hitch blocks	clevis-type, floating and adjustable	clevis-type, floating and adjustable	clevis-type, floating and adjustable	clevis-type, floating and adjustable
Gauge wheels	4" x 11" air tire with tube and ball bearings	4" x 11" air tire with tube and ball bearings	4" x 11" air tire with tube and ball bearings	5" x 13" air tire with tube and ball bearings
Wheel spindle diameter	1 inch	1 inch	1 inch	1 1/8 inch
PTO	category 3 PTO	category 3 PTO	category 3 PTO	category 3 PTO
Gearbox	cast iron	cast iron	cast iron	cast iron
Gears	precision cut, hardened	precision cut, hardened	precision cut, hardened	precision cut, hardened
Belts	#2 B section V-type belts	#2 B section V-type belts	#2 B section V-type belts	#2 B section narrow V-type belts
Pulleys	precision stamped steel	precision stamped steel	precision stamped steel	cast iron

First Choice Equipment is a division of:

BUY SMART

2612 Wilco Boulevard
Wilson, NC 27893
1-888-945-3102

<http://www.firstchoiceequipment.net>